

DESCRIPTION

The MLP-C24 is a high-performance surge protective device (SPD) for 4-20mA signal lines or 2-wire pulse signals (24V DC) that protects electrical instruments by absorbing lightning-induced surge voltage.


This SPD consists of a plug part and a socket part. The plug part features a deterioration indication function that allows users to check it for deterioration with a special tester. The product is designed such that the signal is not interrupted even if the plug is removed from the socket for replacement.

ORDERING INFORMATION

Ordering Code
MLP-C24

SPECIFICATIONS
● PERFORMANCE

Item	Measuring Conditions	Performance
Maximum Continuous Operating Voltage (Uc)	—	27V DC
Rated Current	—	100mA DC
Operation Starting Voltage	V1mA (L-E)	T1-T2: 68-76V T-E: 34-38V
Leakage Current	27V DC	5μA max.
Series Resistance	100mA	5Ω±10%
Insertion Loss	DC to 400kHz	1.0dB max.
Voltage Protection Level (Up)	1.2/50μs, 10kV	T1-T2: 140V max. T-E: 120V max.
Impulse Durability	8/20μs (cat. C2)	10 times (5kA)
	10/350μs (cat. D1)	2 times (2.5kA)
Maximum Discharge Current (Imax)	8/20μs	L1-L2: 5kA L-E: 10kA (5kA×2)
	10/350μs	L1-L2: 1kA L-E: 2kA (1kA×2)
AC Durability	50Hz 0.5A 1s	5 times
Overstressed Fault Mode	—	mode 1
Response Time	—	3ns max.
Plug Replacement Timing Indicator	Checked with special tester	Normal: LED ON
		Faulty: LED OFF
JIS Compliance	JIS C 5381-21 (category: C2/D1)	

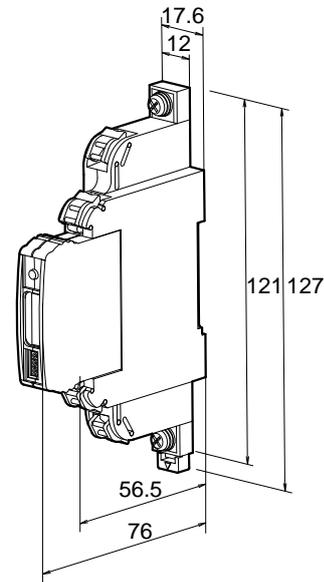
● ENVIRONMENTAL

Location of Use	Machine room or equipment enclosure
Rated Operating Temperature	-40 to 70°C
Rated Operating Humidity	96% RH max. (non-condensing)
Storage Temperature	-40 to 70°C
Storage Humidity	96% RH max. (non-condensing)
Altitude	2000m max.


● PHYSICAL

Construction	Plug-and-socket, two-piece construction
Grounding	Class D [100Ω max.]
Installation	DIN rail mounting (wall-mountable)
Wiring	M4 screw terminal connection Terminals L1, L2, T1, T2 Stranded wire: 0.2mm ² (AWG24) to 2mm ² (AWG14) Insulated solderless terminal for M4, e.g., 0.3-4.1, 1.25-4, 2-4
	Terminal E Stranded wire: 2mm ² (AWG14) min. Insulated solderless terminal for M4, e.g., 2-4
Screwing Torque	0.75 Nm
Dimensions	W17.6 × D127 × H76 mm
Weight	Approx. 90g


● MATERIAL

Plug / Socket	Polyamide
---------------	-----------

TERMINAL ASSIGNMENTS

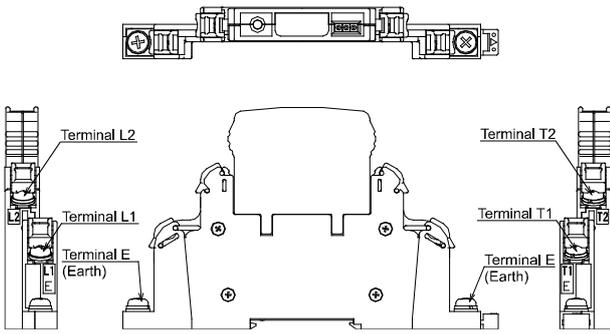

INSTALLATION EXAMPLE

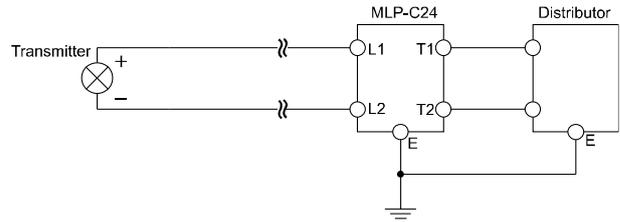

NOTE: If the distance from the MLP device to the equipment to be protected is over 10 meters, it is recommended that an additional MLP device adjacent to the equipment to be protected should be installed.

BLOCK DIAGRAM

