

DESCRIPTION

The MS3108 is a terminal block type frequency to analog converter that converts pulse train signals from flow sensors and the like into commonly used DC signals and provides an isolated dual output.

ORDERING CODE

MS3108 - -

Model _____

Power Supply _____

A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 110V DC

Input _____

O: Dry contact or open collector
(Pull-up: Approx. 13V, 3.3kΩ)
A: AC voltage pulse
(Threshold voltage: Approx. 0.06Vp-p)
D: DC voltage pulse
(Threshold voltage: Approx. 2V)
I: 4 to 20mA DC pulse
(Threshold current: Approx. 8mA)
Y: Other input signals and/or threshold voltage

Output 1 _____

A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signals **3:** 0 to 1V DC
 4: 0 to 10V DC
 5: 0 to 5V DC
 6: 1 to 5V DC
 3W: ±1V DC
 4W: ±10V DC
 5W: ±5V DC
 0: Other DC voltage signals

Output 2 _____
The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.


Options _____

No code: None

/H: Polyurethane conformal coating

/X: Others (Special order)

* For non-standard options, ask MTT for availability.

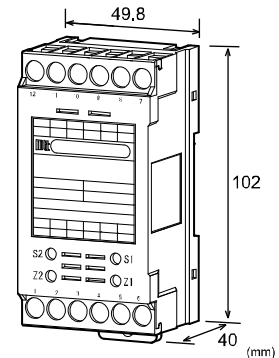
ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left. Also specify a measuring frequency range.

(e.g.) MS3108-A-DA6 (0 to 850Hz)

Other Ordering Examples:

For an input code of "Y": MS3108-A-YAA (0 to 500Hz / Input DC voltage pulse: 0 to 12V / SH = 8.5V, SL = 2.5V)

For an input code of "Y": MS3108-A-YAA (0 to 500Hz / Input AC voltage pulse: 200Vp-p / S = 2Vp-p)

* SH = Threshold level HI, SL = Threshold level LO, S = Threshold level

Note: For DC current pulse input, the range should be specified between 0-100μA and 0-100mA.

SPECIFICATIONS
POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz)
	24V DC: 24V DC±10%
	110V DC: 90 to 121V DC

Power Sensitivity	Better than ±0.1% of span for each power supply range.
--------------------------	--

Power Line Fuse	160mA fuse
------------------------	------------

Maximum Power Consumption

Power	100-240V AC	24V DC	110V DC
	Approx. 7.0VA	Approx. 1.7W	Approx. 2.5W

INPUT SECTION
Input Resistance

Voltage Input Model (DC)	With power:	1MΩ min. (Standard, 5V input)
	Without power:	30kΩ min.

Current Input Model (DC)	250Ω (Standard for 4 to 20mA)
---------------------------------	-------------------------------

Allowable Input Voltage

DC Voltage Input Model	30V DC max., continuous.
DC Current Input Model	40mA DC max., continuous.
AC Voltage Input Model	200Vp-p AC max., continuous (up to ±100V with reference to 0V).

Input Pulse Width	20μs min.
--------------------------	-----------

Duty Ratio	40 to 60%
-------------------	-----------

Ranges Available		
	AC Voltage Pulse	DC Voltage Pulse
Input Range	-300 to 300V	0 to 300V
Input Voltage Span	0.1 to 600V _{p-p}	1 to 300V
Input Bias	N/A	0 to +300%
Threshold Voltage	50mV _{p-p} min.	Hi-Lo voltage: 0.2V min.
Input Frequency	Within the range between 0-20Hz and 0-20kHz.	

Input Spec. Ex.: For 10 to 15V DC voltage pulse input, the input voltage span is 5V and the bias +200%.

OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)	4-20mA single output	750Ω max.
	4-20mA dual output	Output 1: 550Ω max.
		Output 2: 350Ω max.

Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	---

Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	---

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

PERFORMANCE

Accuracy Rating	Better than ±0.3% of span. Ripple: 0.2%p-p or less of span (for at least 10% input) (at 25°C±5°C)
-----------------	--

Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
--------------------	---

Response Time	
Input Frequency	0 to 90% with a step input at 100%
20Hz	8s max.
200Hz	1s max.
2kHz	500ms max.
20kHz	500ms max.

CMRR	100dB min. (500V AC, 50/60Hz)
------	-------------------------------

Isolation	4-way isolation between input, output 1, output 2, and power.
-----------	---

Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
-----------------------	--

Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
---------------------	---

Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

PHYSICAL

Installation	DIN rail mounting
Wiring	M3.5 screw terminal connection (with drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W49.8 × H102.0 × D40.0 mm (including DIN rail)
Weight	140g max.


MATERIAL

Housing	ABS resin (UL 94V-0)
Screw Terminal	Nickel-plated steel
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

STANDARDS CONFORMITY


EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1:2013 Low Voltage Directive (2014/35/EU) IEC61010-1 EN61010-1:2010/A1:2019 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.
-------------------------	--

TERMINAL ASSIGNMENTS

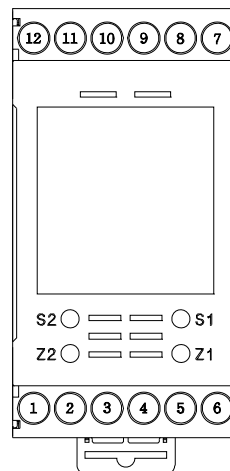


①	+ OUTPUT 2
②	- OUTPUT 2
③	N.C.
④	P (+)
⑤	N (-)
⑥	GND
⑦	+ INPUT
⑧	- INPUT
⑨	N.C.
⑩	N.C.
⑪	+ OUTPUT 1
⑫	- OUTPUT 1

BLOCK DIAGRAM

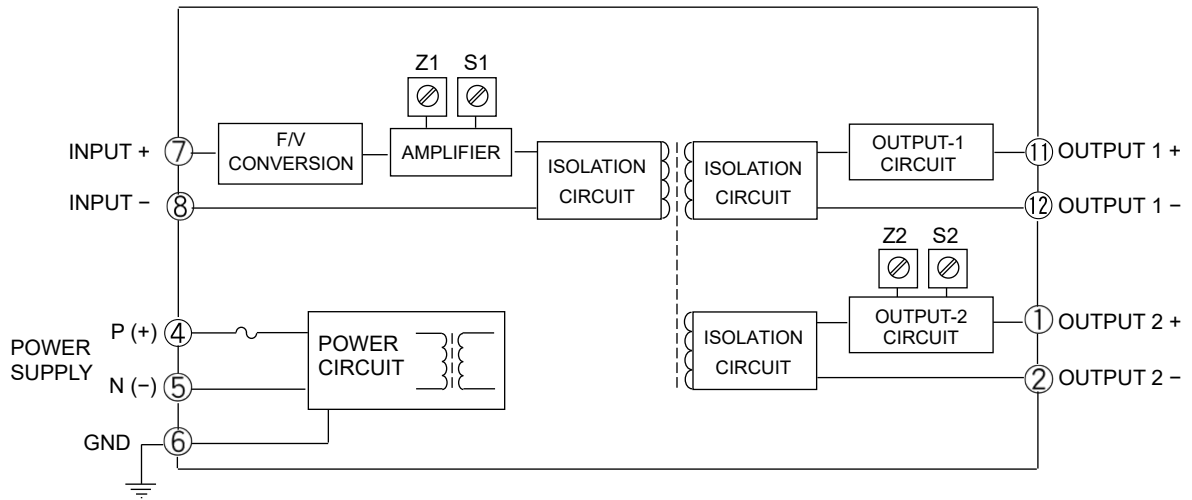

For dry contact or open collector input:

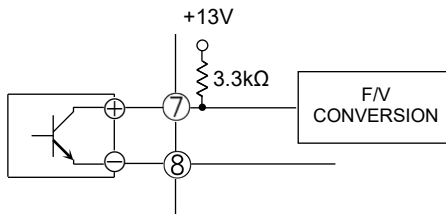

For voltage pulse input:

