


DESCRIPTION

The MS5505D is a plug-in digital alarm setter that compares the levels of DC current or voltage signals with two set-points (upper and lower limits) and outputs two independent isolated relay contact closure signals.

ORDERING CODE

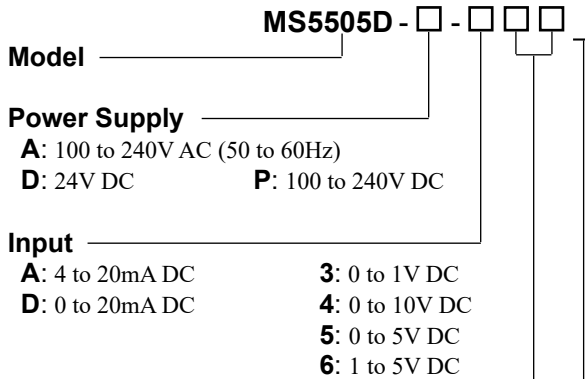

Relay Activation Modes for Output 1&2

Mode of operation for each channel can be selected from the following:

| | With Power | | Without Power |
|-----------|-------------------|-------------------|---------------|
| | Input < Set Value | Input > Set Value | |
| OH | OFF | ON | OFF |
| OL | ON | OFF | OFF |
| CH | ON | OFF | ON |
| CL | OFF | ON | ON |

Note: The mode of operation cannot be changed by users.

Options


- No code:** None
- /K:** Fast response (0 to 90% response time: 100ms max.)
- /H:** Polyurethane conformal coating
- /X:** Others (Special order)
- * For non-standard options, ask MTT for availability.

ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.
(e.g.) MS5505D-A-6OHOL

* The factory default trip point for both channels is 50% or equivalent of input span.

Other Ordering Examples:
For an option code of "X": MS5505D-A-6OHOL/X
(Response time constant: T = 50ms with 90% setting)
For specific trip points*: MS5505D-A-6OHOL
 Trip point for Output 1: 40%
 Trip point for Output 2: 70%
* Specify values in % within the range of 0 to 99% of input span.
Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

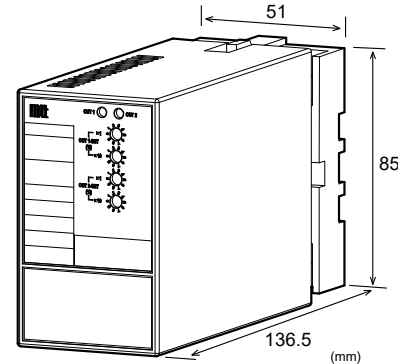

SPECIFICATIONS

POWER SECTION

| | | | |
|----------------------------------|--|--------|-------------|
| Power Requirement | 100 to 240V AC: 85 to 264V AC (47 to 63Hz) | | |
| | 24V DC: 24V DC±10% | | |
| | 100 to 240V DC: 85 to 264V DC | | |
| Power Sensitivity | Better than ±0.1% of span for each power supply range. | | |
| Power Line Fuse | 160mA fuse | | |
| Maximum Power Consumption | | | |
| Power | 100-240V AC | 24V DC | 100-240V DC |
| | 6.5VA | 2.0W | 8.4W |

INPUT SECTION

| | | | |
|--------------------------------|--|------|--|
| Input Resistance | | | |
| Voltage Input (DC) | With power: 1MΩ min. Without power: 10kΩ min. | | |
| Current Input (DC) | 4 to 20mA (std.) | 250Ω | |
| Allowable Input Voltage | | | |
| Voltage Input Model | 30V DC max., continuous. | | |
| Current Input Model | 40mA DC max., continuous. | | |

OUTPUT SECTION

| | | | |
|---------------------------------------|---|--|--|
| Output Signal | Two independent relay contact closure signals OH & OL: Form A contacts CH & CL: Form B contacts | | |
| Trip Points Setting | Through the front-accessible rotary switches. | | |
| Range | 0 to 99% of span (in steps of 1%). | | |
| Accuracy | ±0.5% of span. | | |
| Hysteresis | 1.0%±0.3% of span | | |
| Relay Indicator | OH & OL: The red LED lights up when the relay is ON. CH & CL: The red LED lights up when the relay is OFF. | | |
| Relay Activation without Power | OH & OL: OFF CH & CL: ON | | |
| Relay Start-up Limitation | The relay gets ready for action about 2 seconds after power-up. | | |

● **PERFORMANCE**

| | |
|----------------------------|--|
| Temperature Effect | Better than ±0.15% of span per 10°C change in ambient. |
| Response Time | 150ms max. (0 to 90%) with a step input at 100%. |
| Isolation | Isolation between input, output 1, output 2, and power. |
| Insulation Resistance | 100MΩ min. (@ 500V DC) between input, output 1, output 2, and power. |
| Dielectric Strength | Input / Output 1 / Output 2 / Power: 2000V AC for 1 minute (Cutoff current: 0.5mA) |
| Relay Contacts | |
| Rated Load | 2A 125V AC, 2A 30V DC |
| Maximum Allowable Voltage | 250V AC, 30V DC |
| Maximum Allowable Current | 2A |
| Electrical Life | 2A, 250V AC: 50 × 10 ³ cycles (Frequency: 1,800 cycles/h) 2A, 30V DC: 100 × 10 ³ cycles (Frequency: 1,800 cycles/h) |
| Mechanical Life | 5 × 10 ⁶ cycles (Frequency: 18,000 cycles/h) |
| Surge Withstand Capability | Tested as per ANSI/IEEE C37.90.1-1989. |
| Operating Environment | Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing) |
| Storage Temperature | -10 to 60°C |


● **PHYSICAL**

| | |
|---------------------|--|
| Installation | Wall/DIN rail mounting |
| Mounting Direction | Vertical |
| Screwing Torque | 0.78 to 1.18 [Nm] * Recommended |
| Wiring | M3.5 screw terminal connection |
| External Dimensions | W51 × H85 × D136.5 mm (including the socket) |
| Weight | Main unit: 210g max. Socket: 60g max. |

● **MATERIAL**


| | |
|-----------------------|---|
| Housing | ABS resin (UL 94V-0) |
| Socket | ABS resin (UL 94V-0) |
| Screw Terminal | Galvanized steel with trivalent chromate finish |
| Printed Circuit Board | Glass fabric, epoxy resin (FR-4: UL 94V-0) |

TERMINAL ASSIGNMENTS

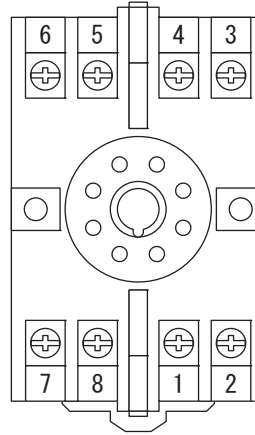


| | |
|---|----------|
| ① | OUTPUT 1 |
| ② | OUTPUT 1 |
| ③ | + INPUT |
| ④ | - INPUT |
| ⑤ | OUTPUT 2 |
| ⑥ | OUTPUT 2 |
| ⑦ | P (+) |
| ⑧ | N (-) |

BLOCK DIAGRAM

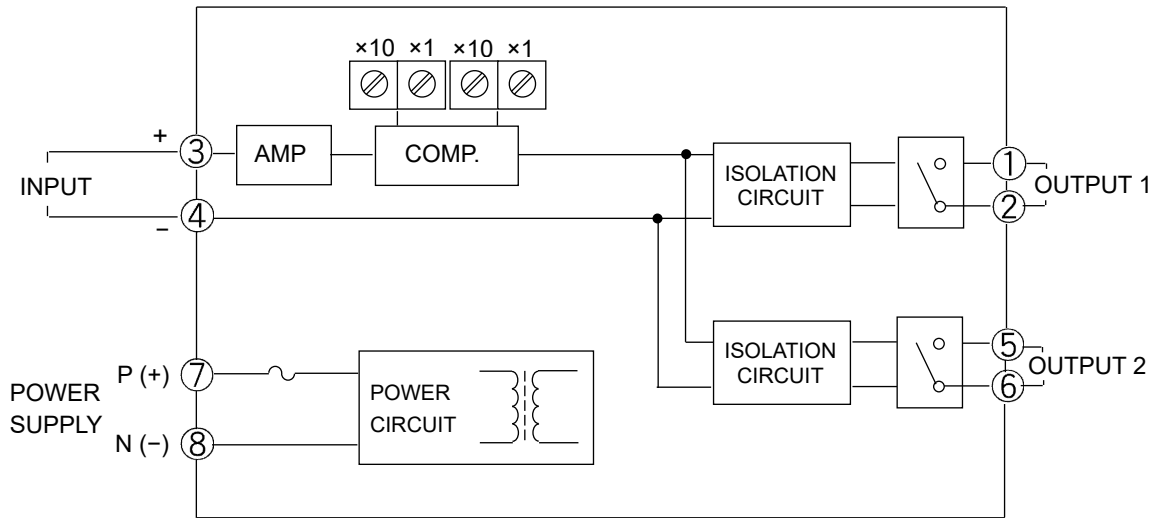

When an inductive load, such as an electric motor, is connected to the output, a relay contact protection circuit must be connected across the load.

Example of AC Power Connection:

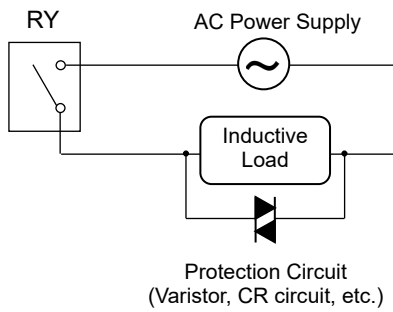

Example of DC Power Connection:

