

DESCRIPTION

The MS3744 is a slim, plug-in high-level signal conditioner that converts DC current or voltage signals into commonly used DC signals and provides isolated single or dual output. This model features a fast response time of 80 μ s (0-90%) with voltage output or 150 μ s (0-90%) with current output.

ORDERING CODE

MS3744 - -

Model _____

Power Supply _____
A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC

Input _____
B: 2 to 10mA DC **3:** 0 to 1V DC
C: 1 to 5mA DC **4:** 0 to 10V DC
D: 0 to 20mA DC **5:** 0 to 5V DC
E: 4 to 20mA DC *1 **6:** 1 to 5V DC
H: 10 to 50mA DC **4W:** \pm 10V DC
Z: Other DC current signals **5W:** \pm 5V DC
0: Other DC voltage signals


*1: Shunt resistor 50 Ω

Output 1 _____
A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signals **3:** 0 to 1V DC
4: 0 to 10V DC
5: 0 to 5V DC
6: 1 to 5V DC
3W: \pm 1V DC
4W: \pm 10V DC
5W: \pm 5V DC
0: Other DC voltage signals

Output 2 _____
No code: None
The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550 Ω maximum for Output 1 and 350 Ω maximum for Output 2.

Options _____
No code: None
/C: CE compliant.
/H: Polyurethane conformal coating
/X: Others (Special order)
* For non-standard options, ask MTT for availability.

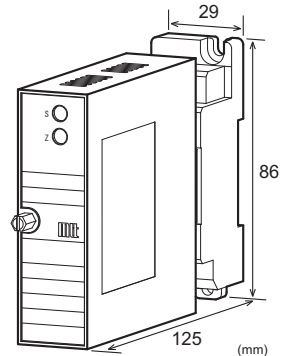
ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.
(e.g.) MS3744-A-4W4W4W

Other Ordering Examples:

For an input code of "0": MS3744-A-066/C (Input: 0.2 to 1V)

For an output code of "0": MS3744-A-E60/C (Output: 2 to 5V)

For an option code of "X": MS3744-A-66/CX (Response frequency: 5kHz)

SPECIFICATIONS
POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC \pm 10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than \pm 0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	4.0VA max	1.2W max	4.8W max
Dual Output	5.0VA max	1.6W max	6.0W max

INPUT SECTION

Input Resistance		
Voltage Input (DC)	With or without power: 1M Ω min.	
Current Input (DC)	4 to 20mA (std.)	50 Ω
	2 to 10mA	250 Ω
	1 to 5 mA	100 Ω
	0 to 20mA	50 Ω
	10 to 50mA	10 Ω
Allowable Input Voltage		
Voltage Input Model	30V DC max., continuous. (Standard for a span up to 10V)	
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)	

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100 μ A ^{*1} to 200mA	200mV ^{*2} to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from ^(*)200 μ A to 200mA and ^(*)400mV to 600V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

Note: The input range of -30 to +30V is subject to CE approval.

● OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10k Ω min.
	100mV	100k Ω min.
Current Output (DC)	4-20mA single output	750 Ω max.
	4-20mA dual output	Output 1:
		Output 2:
		350 Ω max.

Zero Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	---

Span Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	---

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

Note: For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE

Accuracy Rating	Better than \pm 0.1% of span (at 25°C \pm 5°C).
Temperature Effect	Better than \pm 0.2% of span per 10°C change in ambient.
Response Time	When the Output 1 is voltage: 80 μ s max. (0 to 90%) with a step input at 100% (Frequency characteristics: 10kHz-3dB). When the Output 1 is current: 150 μ s max. (0 to 90%) with a step input at 100% (Frequency characteristics: 3kHz-3dB).
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100M Ω min. (@ 500V DC) between input, output 1, output 2, power, and ground.

Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 \times H86 \times D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.


● MATERIAL

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 μ m gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

● STANDARDS CONFORMITY

EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1:2013 Low Voltage Directive (2014/35/EU) IEC61010-1 EN61010-1:2010/A1:2019 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.
-------------------------	---

TERMINAL ASSIGNMENTS

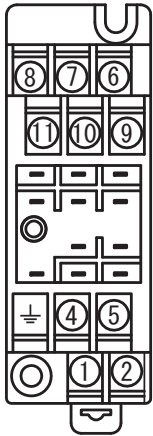

①	P (+)	POWER
②	N (-)	
③	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

BLOCK DIAGRAM

