




DESCRIPTION

The MS3704W is a slim, plug-in high-level signal conditioner (isolator) that converts DC current or voltage signals into commonly used DC signals and provides an isolated dual output. This model features separate adjustment of the two outputs (Output 1 & Output 2).

ORDERING CODE

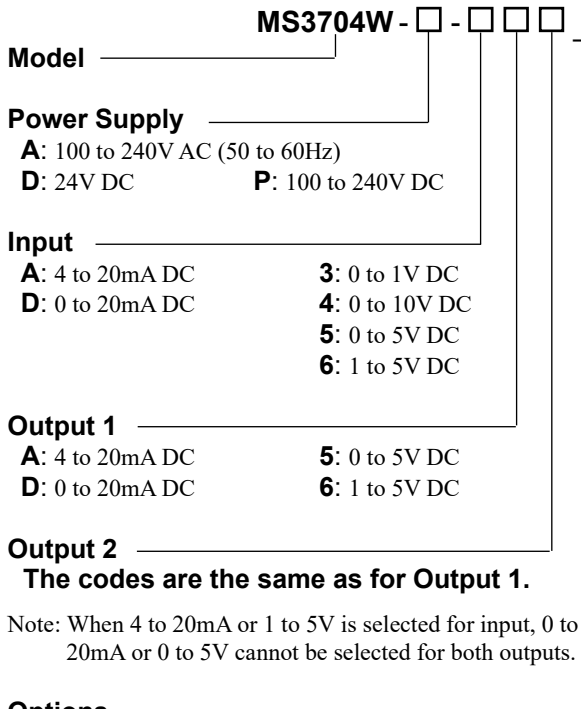

Note: When 4 to 20mA or 1 to 5V is selected for input, 0 to 20mA or 0 to 5V cannot be selected for both outputs.

Options

- No code:** None
- /H:** Polyurethane conformal coating
- /X:** Special order
- * For non-standard options, ask MTT for availability.

ORDERING INFORMATION


To place an order, please use the ordering code format as shown above.
(e.g.) MS3704W-A-AA6

Another Ordering Example:
For an option code of "X": MS3704W-A-666/X (0-90% response time: 200ms max.)

SPECIFICATIONS

POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
	6.5VA max	2.0W max	2.5W max

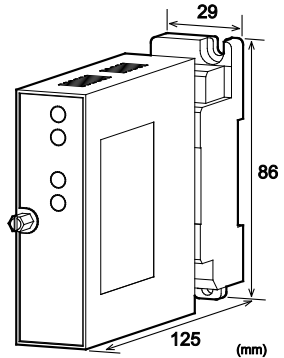

INPUT SECTION

Input Resistance	
Voltage Input (DC)	1MΩ min. with or without power.
Current Input (DC)	250Ω
Allowable Input Voltage	
Voltage Input	30V DC max., continuous.
Current Input	40mA DC max., continuous.

OUTPUT SECTION

Allowable Output Load	
Voltage Output (DC)	Output 1: 2mA max. Output 2: 2mA max.
Current Output (DC)	Output 1: 750Ω max. Output 2: 350Ω max.
Zero Adjustment	Output 1: Approx. ±5% of span. Output 2: Approx. ±5% of span. (Adjustable by the front-accessible trimmers.)
Span Adjustment	Output 1: Approx. ±5% of span. Output 2: Approx. ±5% of span. (Adjustable by the front-accessible trimmers.)

PERFORMANCE

Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.

Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C


● **PHYSICAL**

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● **MATERIAL**

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2μm gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4; UL 94V-0)

TERMINAL ASSIGNMENTS

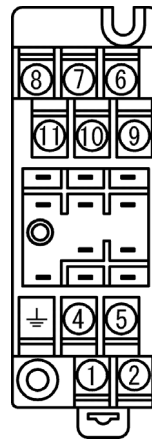

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

BLOCK DIAGRAM

