

**DESCRIPTION**

The MS3740 is a slim, plug-in signal reverser that converts DC current or voltage input signals into DC signals inversely proportional to those input signals and provides isolated single or dual output.

**ORDERING CODE**

**Model** \_\_\_\_\_ **MS3740** -  -

**Power Supply** \_\_\_\_\_

**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC                      **P:** 100 to 240V DC

**Input** \_\_\_\_\_

<b>A:</b> 4 to 20mA DC	<b>3:</b> 0 to 1V DC
<b>B:</b> 2 to 10mA DC	<b>4:</b> 0 to 10V DC
<b>C:</b> 1 to 5mA DC	<b>5:</b> 0 to 5V DC
<b>D:</b> 0 to 20mA DC	<b>6:</b> 1 to 5V DC
<b>E:</b> 4 to 20mA DC*1	<b>4W:</b> ±10V DC
<b>H:</b> 10 to 50mA DC	<b>5W:</b> ±5V DC
<b>Z:</b> Other DC current signals	<b>0:</b> Other DC voltage signals

\* 1: Shunt resistor 50Ω

**Output 1** \_\_\_\_\_

<b>A:</b> 20 to 4mA DC	<b>1:</b> +10 to 0mV DC
<b>D:</b> 20 to 0mA DC	<b>2:</b> +100 to 0mV DC
<b>Z:</b> Other DC current signals	<b>3:</b> +1 to 1V DC
	<b>4:</b> +10 to 0V DC
	<b>5:</b> +5 to 0V DC
	<b>6:</b> +5 to +1V DC
	<b>3W:</b> +1 to -1V DC
	<b>4W:</b> +10 to -10V DC
	<b>5W:</b> +5V to -5V DC
	<b>0:</b> Other DC voltage signals

**Output 2** \_\_\_\_\_

**No code:** None

**The codes are the same as for Output 1.**

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

**Options** \_\_\_\_\_

**No code:** None


**/K:** Fast response (0 to 90% response time: 10ms max.)

**/L:** Dual current output with high output load  
 \* Not subject to CE approval.  
 (OUT-1: 750Ω / OUT-2: 550Ω)

**/H:** Polyurethane conformal coating

**/X:** Others (Special order)

\* For non-standard options, ask MTT for availability.

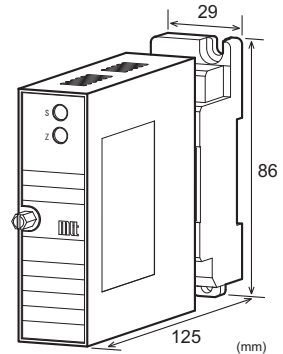
**ORDERING INFORMATION**

To place an order, please use the ordering code format as shown on the left.  
 (e.g.) MS3740-A-AA6

Other Ordering Examples:  
 For an input code of "Z": MS3740-A-ZAA (Input: 8 to 20mA)  
 For an output code of "0": MS3740-A-A60 (Output: 5 to 2V)  
 For an option code of "X": MS3740-A-66/X (Response frequency: 50Hz)  
 Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

**SPECIFICATIONS**
**POWER SECTION**

<b>Power Requirements</b>	100 to 240V AC: 85 to 264V AC (47 to 63Hz)		
	24V DC: 24V DC±10%		
	100 to 240V DC: 85 to 264V DC		
<b>Power Sensitivity</b>	Better than ±0.1% of span for each power supply range.		
<b>Power Line Fuse</b>	160mA fuse is installed (standard).		
<b>Power Consumption</b>			
Power	100-240V AC	24V DC	100-240V DC
Single Output	4.0VA max	1.2W max	4.8W max
Dual Output	5.0VA max	1.5W max	6.0W max

**INPUT SECTION**

<b>Input Resistance</b>			
Voltage Input (DC)	With or without power: 1MΩ min.		
Current Input (DC)	4 to 20mA (std.)	250Ω	
	2 to 10mA	250Ω	
	1 to 5 mA	100Ω	
	0 to 20mA	250Ω	
	10 to 50mA	10Ω	
<b>Allowable Input Voltage</b>			
Voltage Input Model	30V DC max., continuous. (Standard for a span up to 10V)		
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)		

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100µA <sup>(*)</sup> to 200mA	200mV <sup>(*)</sup> to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from <sup>(\*)</sup>200µA to 200mA and <sup>(\*)</sup>400mV to 600V, respectively.

Input Spec. Ex.1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

● OUTPUT SECTION		
Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)	4-20mA single output	750Ω max.
	4-20mA dual output	Output 1: 550Ω max.
		Output 2: 350Ω max.
Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. ±5% span. (Adjustable by the front-accessible trimmer.)	

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

Note: For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex.1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.


● PERFORMANCE	
Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.

Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL	
Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.
● MATERIAL	
Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2µm gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

● STANDARDS CONFORMITY	
EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1:2013 Low Voltage Directive (2014/35/EU) IEC61010-1 EN61010-1:2010/A1:2019 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.

### TERMINAL ASSIGNMENTS

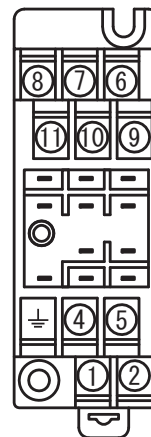

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

**BLOCK DIAGRAM**

