

**DESCRIPTION**

The MS3763B is a slim, plug-in RTD differential temperature transmitter that detects a temperature difference between two 2-wire RTD's, converts the difference into commonly used DC signals, and provides isolated single or dual output.

**ORDERING CODE**

<b>Model</b>	<b>MS3763B</b> - □ - □ □ □ □			
<b>Power Supply</b>	<b>A:</b> 100 to 240V AC (50 to 60Hz)	<b>D:</b> 24V DC	<b>P:</b> 100 to 240V DC	
<b>Input</b>	2-wire RTD Pt 100Ω			
<b>Measuring Temperature Range</b>	<b>A:</b> -20 to 30°C	<b>B:</b> 0 to 50°C	<b>C:</b> 50 to 100°C	<b>Y:</b> Other than those above.
<b>Input Temperature Difference (RTD A – RTD B)</b>	<b>D:</b> ±10°C	<b>E:</b> ±20°C	<b>F:</b> 0 to 20°C	<b>G:</b> 0 to 50°C <b>Y:</b> Other than those above.
<b>Output 1</b>	<b>A:</b> 4 to 20mA DC	<b>D:</b> 0 to 20mA DC	<b>Z:</b> Other DC current signals	<b>1:</b> 0 to 10mV DC <b>2:</b> 0 to 100mV DC <b>3:</b> 0 to 1V DC <b>4:</b> 0 to 10V DC <b>5:</b> 0 to 5V DC <b>6:</b> 1 to 5V DC <b>3W:</b> ±1V DC <b>4W:</b> ±10V DC <b>5W:</b> ±5V DC <b>0:</b> Other DC voltage signals
<b>Output 2</b>	<b>No code:</b> None <b>The codes are the same as for the Output 1.</b>			

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

**Options**


**No code:** None

**/L:** Dual current output with high output load (OUT-1: 750Ω / OUT-2: 550Ω)

**/H:** Polyurethane conformal coating

**/X:** Others (Special order)

\* For non-standard options, ask MTT for availability.


**ORDERING INFORMATION**

To place an order, please use the ordering code format as shown on the left.

(e.g.) MS3763B-A-ADA6

**Other Ordering Examples:**

For an output code of "0": MS3763B-A-BEA0 (Output: 2 to 10V)

For an option code of "X": MS3763B-A-CFA6/X (JPt 100Ω)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /LX).

**SPECIFICATIONS**
**POWER SECTION**

<b>Power Requirements</b>	100 to 240V AC: 85 to 264V AC (47 to 63Hz)		
	24V DC: 24V DC±10%		
	100 to 240V DC: 85 to 264V DC		
<b>Power Sensitivity</b>	Better than ±0.1% of span for each power supply range.		
<b>Power Line Fuse</b>	160mA fuse is installed (standard).		
<b>Power Consumption</b>			
<b>Power</b>	100-240V AC	24V DC	100-240V DC
<b>Single Output</b>	5.5VA max	1.5W max	6.0W max
<b>Dual Output</b>	6.5VA max	1.8W max	7.2W max

**INPUT SECTION**

<b>Excitation Current</b>	Approx. 2mA
<b>Lead Wire Resistance</b>	50Ω max. per wire

**OUTPUT SECTION**

<b>Allowable Output Load</b>		
<b>Voltage Output (DC)</b>	1V span and up 10mV 100mV	2mA max. 10kΩ min. 100kΩ min.
<b>Current Output (DC)</b>	4-20mA single output 4-20mA dual output	750Ω max. Output 1: 550Ω max. Output 2: 350Ω max.
<b>Zero Adjustment</b>	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
<b>Span Adjustment</b>	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	

Burnout Protection	Upscale (even if any of the three wires, RTD A, RTD B and COM is opened)	
Ranges Available	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
Note: For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

**PERFORMANCE**

Accuracy Rating		
<Standard Specifications> (at ambient temp. 25°C±5°C)		
Temperature Range	Input Temp. Difference	Accuracy
-20 to 30°C 0 to 50°C 50 to 100°C	0 to 20°C	Better than ±1.0% of span.
	0 to 50°C	Better than ±0.5% of span.
	±10°C	Better than ±1.0% of span.
	±20°C	Better than ±1.0% of span.
For any other temperature ranges and input temperature differences, ask MTT for availability.		
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.	
Response Time	300ms max. (0 to 90%) with a step input at 100%.	
CMRR	100dB min. (500V AC, 50/60Hz)	
Isolation	4-way isolation between input, output 1, output 2, and power.	
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.	
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)	
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.	
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)	
Storage Temperature	-10 to 60°C	


**PHYSICAL**

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

**MATERIAL**


Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2μm gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

**TERMINAL ASSIGNMENTS**

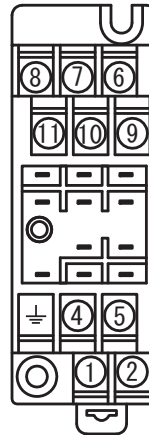

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	RTD A	
⑩	RTD B	
⑪	COM	

**BLOCK DIAGRAM**

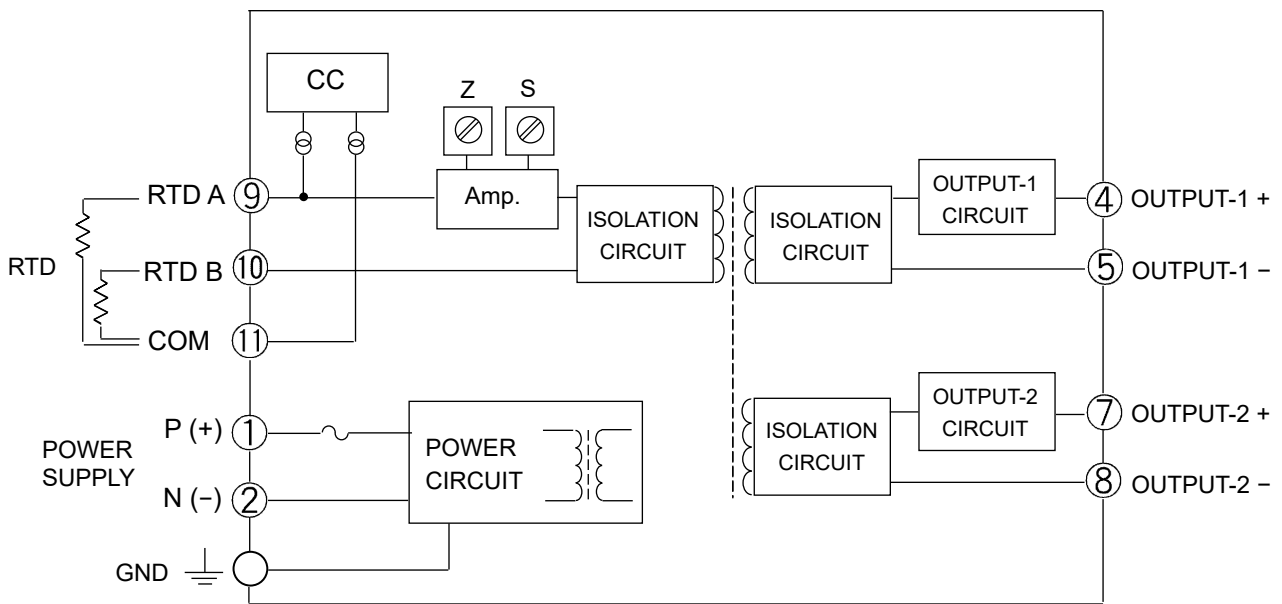

\* Input Temperature Difference = RTD A – RTD B

(Example) When the following configurations are specified:

Measuring temperature range: 50 to 100°C

Input temperature difference: ±10°C

Output 1: ±10V

Output 2: 0 to 10V

RTD A	RTD B	RTD A – RTD B	Output 1	Output 2
75°C	75°C	75°C – 75°C = 0°C	0V	5V
75°C	65°C	75°C – 65°C = 10°C	10V	10V
65°C	75°C	65°C – 75°C = -10°C	-10V	0V