

DESCRIPTION

The MS5310 is a plug-in type potentiometer transmitter that detects changes in the resistance of potentiometric sensors, converts them into commonly used DC signals and provides an isolated dual output.

ORDERING CODE

MS5310 - -

Model _____

Power Supply _____

A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC

Input _____

Range between 0-100Ω and 0-10kΩ

Output 1 _____

A: 4 to 20mA DC	1: 0 to 10mV DC
D: 0 to 20mA DC	2: 0 to 100mV DC
Z: Other DC current signals	3: 0 to 1V DC
	4: 0 to 10V DC
	5: 0 to 5V DC
	6: 1 to 5V DC
	3W: ±1V DC
	4W: ±10V DC
	5W: ±5V DC
	0: Other DC voltage signals


Output 2 _____

The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
 Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____

No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/H: Polyurethane conformal coating
/X: Others (Special order)
 * For non-standard options, ask MTT for availability.

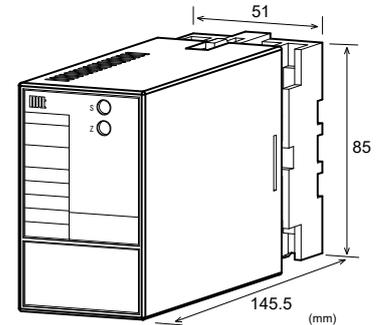

ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.

(e.g.) MS5310-A-A6

* Resistance range: Specify a resistance range (e.g. 0 to 1kΩ); otherwise, products will be supplied with a factory default of 0 to 10kΩ.

Other Ordering Examples:

For an output code of "0": MS5310-A-A0 (Output: 2 to 5V)

For a specific resistance range: MS5310-A-AA (0 to 500Ω)

(When you specify a resistance range, our factory performs the test accordingly, the fact of which will be indicated in the label attached.)

For an option code of "X": MS5310-A-AA/X (Response frequency: 50Hz)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS

POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse		
Maximum Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
	Approx. 5.0VA	Approx. 1.5W	Approx. 6.0W

INPUT SECTION

Input Signal	Range between 0-100Ω and 0-10kΩ.
Measuring Voltage	Approx. 0.5V
Allowable Lead Wire Resistance	10% or less of total resistance per wire. (The resistance of all three wires must be equal.)

● **OUTPUT SECTION**

Allowable Output Load		
Voltage Output (DC)	1V span and up 10mV 100mV	2mA max. 10kΩ min. 100kΩ min.
Current Output (DC)	4-20mA single output 4-20mA dual output	750Ω max. Output 1: 550Ω max. Output 2: 350Ω max.
Zero Adjustment	Approx. 0 to 50% of total resistance. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. 50 to 100% of total resistance. (Adjustable by the front-accessible trimmer.)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		
● PERFORMANCE		
Accuracy Rating	Better than ±0.2% of span (at 25°C±5°C).	
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.	
Response Time	170ms max. (0 to 90%) with a step input at 100%.	
CMRR	100dB min. (500V AC, 50/60Hz)	
Isolation	4-way isolation between input, output 1, output 2, and power.	
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.	
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)	
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.	
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)	
Storage Temperature	-10 to 60°C	


● **PHYSICAL**

Installation	Wall/DIN rail mounting
Mounting Direction	Vertical
Screwing Torque	0.78 to 1.18 [Nm] * Recommended
Wiring	M3.5 screw terminal connection
External Dimensions	W51 × H85 × D145.5 mm (including the socket)
Weight	Main unit: 200g max. Socket: 80g max.

● **MATERIAL**

Housing	ABS resin (UL 94V-0)
Socket	ABS resin (UL 94V-0)
Screw Terminal	Galvanized steel with trivalent chromate finish
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

TERMINAL ASSIGNMENTS

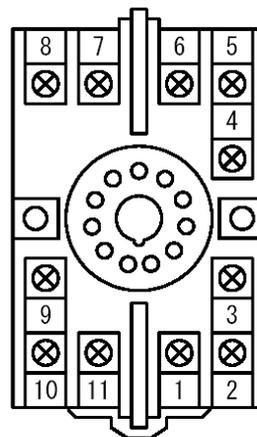

①	+ OUTPUT 1
②	- OUTPUT 1
③	N.C.
④	POT A
⑤	POT B
⑥	POT C
⑦	P (+)
⑧	N (-)
⑨	GND
⑩	+ OUTPUT 2
⑪	- OUTPUT 2

BLOCK DIAGRAM

